

# Triumph Tiger 885i / 955i Luggage Restoration Kit

## Fitting Information

### Tools Required:


Small flat-blade screwdriver or terminal screwdriver  
Pozidrive PZ2 screwdriver - for luggage feet screws

### Note:

*The main pad is designed to fit without adhesive. Double-sided tape may be used if preferred for additional security but is not required for normal fitting.*

### Kit Components

A	Main base pad	1
B	Rear retaining strip	1
C	Side stabiliser stops	2
D	Top box protective feet	4
E	Side pannier protective feet	4

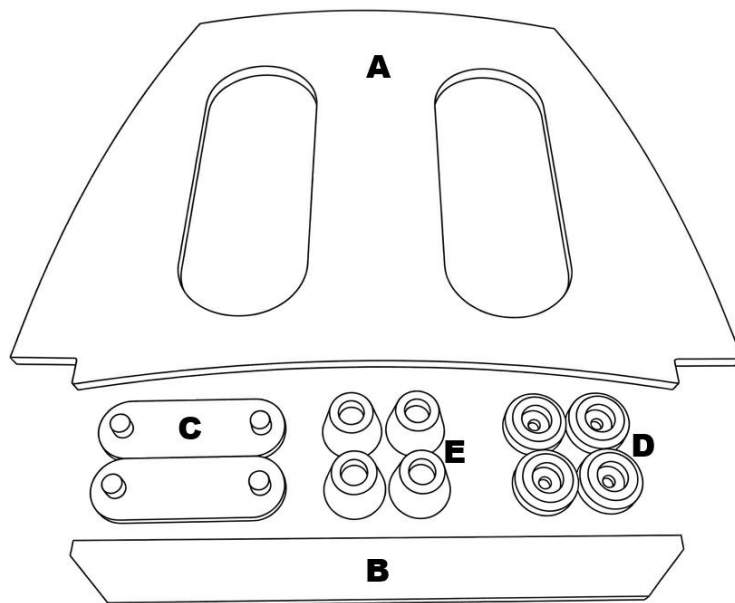

# Triumph Tiger 885i / 955i Luggage Restoration Kit

## Fitting Information

### Fitting Steps

#### 1. Remove the rear retaining strip & main pad

The original pad is usually held with double-sided tape but should pull away cleanly.

#### 2. Remove the old side stops

Carefully pry out the two old side stops, if they are still in place, they may already be missing or broken. If the friction fit pins are broken in the holes they can be pushed through with a suitably sized terminal screwdriver or similar.

#### 3. Fit the new main pad

Position the new main pad in place, ensuring that it is pushed up against the metal bracket, where the rear strip will be fitted. The other end can be gently bent under the front release catch.

Ensure the pad sits flat on the base and is correctly aligned.

*No adhesive strip is required, although double-sided tape can be used if preferred.*

#### 4. Fit the new rear strip

Fit the rear strip, checking the orientation carefully.

The cut-outs/recesses must align with the protruding nuts on the top box, otherwise the top box will not mount on the rack correctly. The shape of the strip indicates the correct orientation.

Push the strip fully into place and make sure it sits flush against the rear edge.

#### 5. Fit the side stops

Push the new side stops into the original mounting holes.

Make sure they are seated securely.

#### 6. Refit the top box

Fit the top box to the motorcycle as normal and check that it sits securely.

Movement and rattling should now be greatly reduced.

### Fitting the Top Box and Pannier Feet


#### 7. Remove the old feet or remaining screws

Each foot is held in place with a small posidriv screw.

Remove the screw from each old foot location. Some feet may already be missing.

**Ensure the screws are clean and free from any remaining rubber material. Refit taking care not to overtighten the screws forcing the head through the new feet.**

## Triumph Tiger 885i / 955i Luggage Restoration Kit Fitting Information

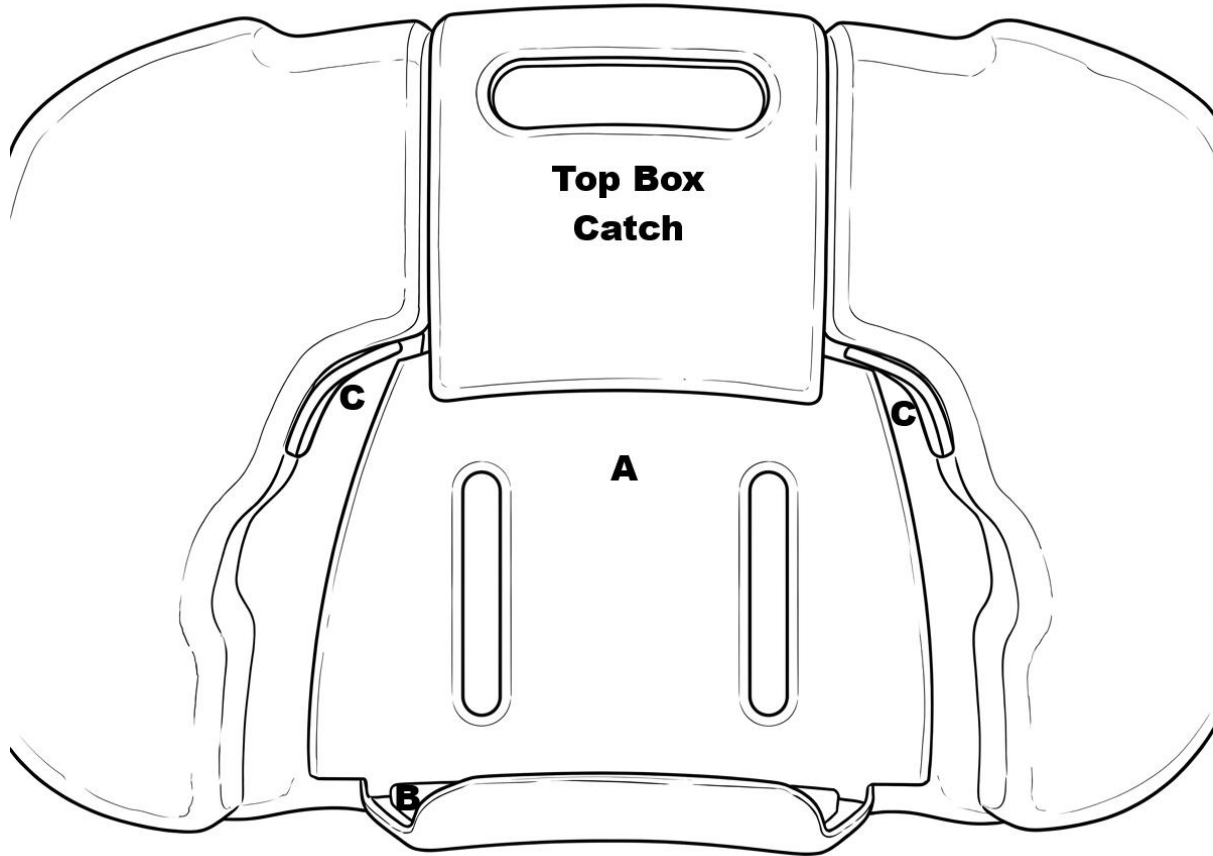

### **Need Help?**

If you have any questions during fitting, or in the unlikely event that you are not completely satisfied with your purchase, please get in touch and we will do our very best to help.

Email: [info@tigerforgedesigns.com](mailto:info@tigerforgedesigns.com)

WhatsApp: Use the contact link on [www.tigerforgedesigns.com](http://www.tigerforgedesigns.com)

### **Happy with Your Purchase?**

If this product solved your problem, we would greatly appreciate a review. Your feedback helps other Triumph owners and supports the continued development of new products.

**Designed to Keep Stuff Working.**